


17/20 MM FRP PANEL Kit

Range : 7 to 26 tonne GVW rating

Family : FRP panel

Execution : **CLASSIC**

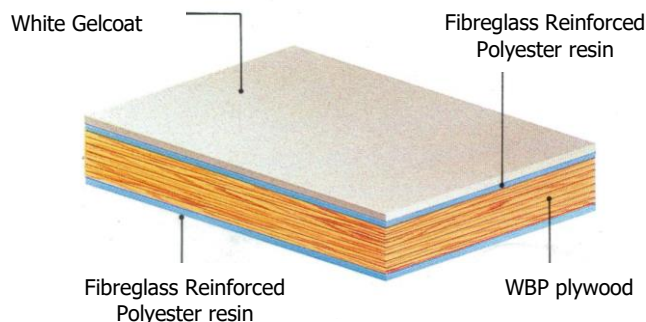

BODY DIMENSIONS (mm)

External length : 3 500 to 13 600 mm

External width : 2 540 mm max.

Internal height : 3 000 mm max.

REAR FRAME

- Rear frame in zinc steel sheet construction
- 270° opening barn doors in 20 mm Fibreglass Reinforced Plywood panel
- 2 external locking bars – 1 on each door leaf

OPTIONAL EXTRAS

Rear frame in stainless steel or powder coated finish colour white

- Top flap in combination with tail-lift
- Bare rear frame (complete seal by tail-lift)
- Roller shutter door

SIDE WALLS

- 17 or 20 mm Fibreglass Reinforced Plywood panels GRP on both sides (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Reinforced series, bottom profile/skirting plate with oversized assembly (trailer and semitrailer)
- Reinforced steel skirting plate
- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Single swing door, double swing door or sliding door
- Roll-up door

FRONT BULKHEAD

- 17 or 20 mm FRP panel (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Reinforced steel skirting plate
- Upward opening access – sliding access

ROOF

- Mill finish or anodised aluminium profiles
- One piece semi-translucent or white opaque roof riveted to the roof frame

OPTIONAL EXTRAS

- Clear light or translucent roof
- Insulated roof
- Ceiling light (12 LED lamps)

