


INSULATED PANEL Kit

Range : 6,5 tonne GVW rating max.

Family : ISOBASE

Execution : **CLASSIC**

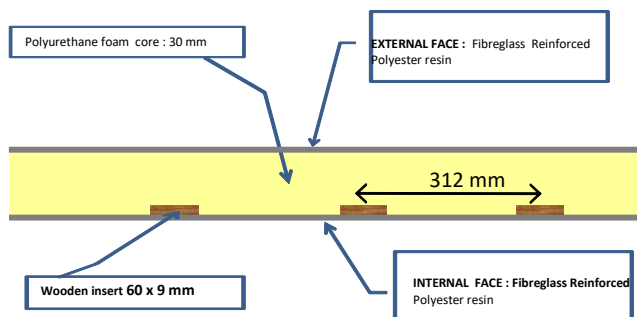

BODY DIMENSIONS (mm)

External length : 1 500 to 6 000 mm

External width : 2 350 mm max.

Internal height : 2 450 mm max.

REAR FRAME

- Rear frame in zintec steel sheet construction
- 270° opening barn doors in 30 mm insulated panel
- Stainless steel recessed lock on right door leaf

OPTIONAL EXTRAS

- Rear frame in stainless steel or powder coated finish colour white
- Top flap in combination with tail-lift
- Roller shutter door
- No rear frame – solid panel front and rear

SIDE WALLS

- 30 mm insulated panels 'ISOBASE'
- Polyurethane foam core** 40 Kg/m³ with upright wooden inserts 60 x 9 at the interval of 312 mm
- GRP on both sides (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Single swing door or double swing door
- Recessed sliding door

FRONT BULKHEAD

- 30 mm insulated panel (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Front bulkhead reinforced for refrigeration unit
- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Upward opening access – sliding access
- Polyester nose cone

ROOF

- 30 or 50 mm insulated roof panel
- Ceiling light – 12 LED lamps (optional extra)

SUB-FRAME (optional extra)

- Mill finish aluminium sub-frame in kit format
- Aluminium longitudes
- Aluminium cross-members

OPTIONAL EXTRAS

- Mudwings – side-guards
- Footsteps (4 rungs)

