


INSULATED PANEL Kit

Range : 6,5 tonne GVW rating max.

Family : ISOBASE

Execution : **EUROPAL**

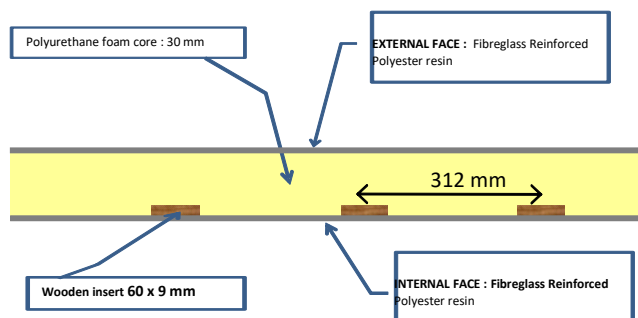

BODY DIMENSIONS (mm)

External length : 1 500 to 6 000 mm

External width : 2 350 mm max.

Internal height :

2 350 mm max. with top flap

2 400 mm max. with 2 barn doors

REAR FRAME

- Bolted rear frame – no welding
- Mill finish or anodised vertical aluminium uprights
- Top and bottom cross-members are either galvanised steel or stainless steel
- 270° opening barn doors in 30 mm insulated panel
- 1 stainless steel recessed lock on right door leaf

OPTIONAL EXTRAS

- Steel rear frame
- Top flap in combination with tail-lift
- Roller shutter door
- No rear frame – solid panel front and rear

SIDE WALLS

- 30 mm insulated panels 'ISOBASE'
- Polyurethane foam core** 40 kg/m³ with upright wooden inserts 60 x 9 at the interval of 312 mm
- GRP on both sides (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Lashing rails, lashing tubes, interior protection for removing cargo
- Aluminium or galvanised steel skirting plate
- Single swing door or double swing door
- Recessed sliding door
- Roll-up door

FRONT BULKHEAD

- 30 mm insulated panel 'ISOBASE'

OPTIONAL EXTRAS

- Front bulkhead reinforced for refrigeration unit
- Lashing rails, lashing tubes, interior protection for removing cargo
- Aluminium or galvanised steel skirting plate
- Upward opening access – sliding access
- Polyester nose cone

ROOF

- 30 mm or 40 mm insulated roof panel
- Ceiling light - 12 LED lamps (optional extra)

SUB-FRAME (optional extra)

- Mill finish aluminium sub-frame in kit format
- Aluminium longitudes
- Aluminium cross-members

OPTIONAL EXTRAS

- Mudwings - side-guards
- Footsteps (4 rungs)

