


REINFORCED INSULATED PANEL Kit

Range : 7 to 26 tonne GVW rating

Family : ISOPLUS

Execution : **CLASSIC**

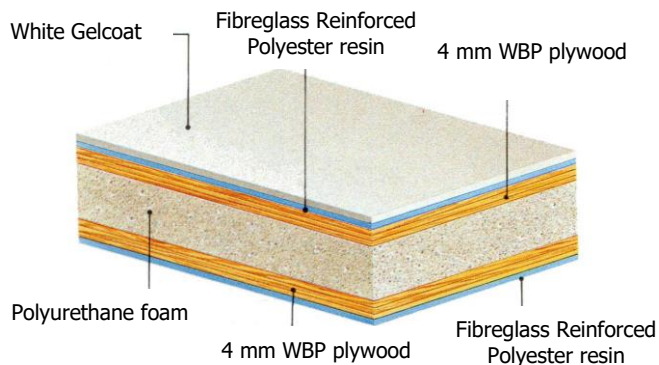

BODY DIMENSIONS (mm)

External length : 3 500 to 13 600 mm

External width : 2 540 mm max.

Internal height : 3 000 mm max.

REAR FRAME

- Rear frame in zintec steel sheet construction
- 270° opening barn doors in 30 mm insulated panel
- 2 external locking bars – 1 on each door leaf

OPTIONAL EXTRAS

Rear frame in stainless steel or powder coated finish colour white

- Top flap in combination with tail-lift
- Roller shutter door
- No rear frame – solid panel front and rear

SIDE WALLS

- 30 mm insulated panels 'ISOPLUS'
- Polyurethane foam core** 35 kg/M3 in between two 4 mm WBP plywood sheets
- GRP on both sides (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Reinforced series, bottom profile/skirting plate with oversized assembly (trailer and semitrailer)
- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Single swing door, double swing door or sliding door
- Roll-up door

FRONT BULKHEAD

- 30 mm insulated panel (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Front bulkhead reinforced for refrigeration unit
- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Upward opening access – sliding access

ROOF

- 30 or 50 mm insulated roof panel
- Ceiling light - 12 LED lamps (optional extra)

