


REINFORCED INSULATED PANEL Kit

Range : 7 to 26 tonne GVW rating

Family : ISOPLUS

Execution : **EUROPAL**

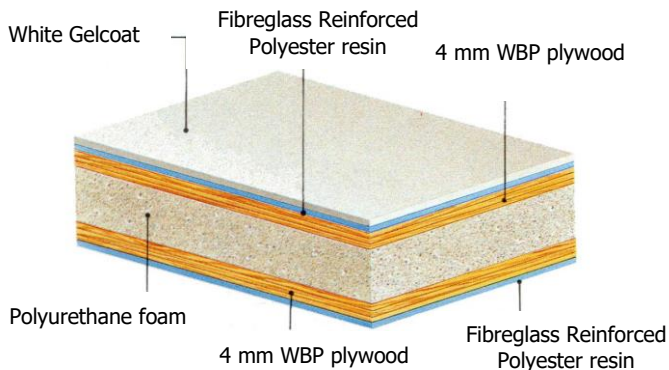

BODY DIMENSIONS (mm)

External length : 3 500 to 13 600 mm

External width : 2 540 mm max.

Internal height : 3 000 mm max.

REAR FRAME

- Rear frame in zintec steel sheet construction
- 270° opening barn doors in 30 mm insulated panel
- 2 external locking bars – 1 on each door leaf

OPTIONAL EXTRAS

- Rear frame in stainless steel or powder coated finish colour white
- Top flap in combination with tail-lift
- Bare rear frame (complete seal by tail-lift)
- Roller shutter door

SIDE WALLS

- 30 mm insulated panels 'ISOPLUS'

Polyurethane foam core 35 kg/M3 in between two 4 mm WBP plywood sheets
GRP on both sides (colour based on white RAL 9010)

OPTIONAL EXTRAS

- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Single swing door or double swing door
- Recessed sliding door
- Roll-up door



FRONT BULKHEAD

- 30 mm insulated panel 'ISOPLUS'

OPTIONAL EXTRAS

- Front bulkhead reinforced for refrigeration unit
- Lashing rails, lashing tubes, interior protection for removing cargo
- Galvanised steel skirting plate
- Upward opening access – sliding access

ROOF

- 30 mm or 40 mm insulated roof panel
- Ceiling light – 12 LED lamps (optional extra)

SUB-FRAME – 13 ton GVW rating max **(optional extra)**

- Galvanised steel sub-frame in kit format

